

ISSN 1673-565X  
CODEN JZUSBN  
(Former ISSN: 1009-3095, CODEN: JZUSFR)

Vol. 8 No. 12 Dec.

# Journal of Zhejiang University

SCIENCE 

*An international applied physics & engineering journal*  
Editor-in-Chief: Wei YANG

ISSN 1673-565X



Zhejiang University

 Springer

2007

# Journal of Zhejiang University SCIENCE A

An International Applied Physics & Engineering Journal

ISSN 1673-565X (Print); ISSN 1862-1775 (Online), Monthly

**Editor-in-Chief** Wei Yang *Mechanics*, Zhejiang University yangw@zju.edu.cn

**Advisor Emeritus** Yun-he Pan *Computer science*, Chinese Academy of Engineering & Zhejiang University

## Foreign Members of the Editorial Board

K. Balasubramanian	<i>Computer</i> , California State Univ., USA	T. D. Lee	<i>Physics</i> , Columbia Univ., USA
H. J. Eichler	<i>Laser &amp; nonlinear optics</i> , TU Berlin, Germany	Fanghua Lin	<i>Mathematics</i> , New York Univ., USA
David Gross	<i>Theoretical physics</i> , Univ. of California, USA	Raj Reddy	<i>Computer</i> , Carnegie Mellon Univ., USA
Sailing He	<i>Photonics &amp; electromagnetics</i> , KTH, Sweden	Ryoichi Yamamoto	<i>Materials science</i> , Tokyo Univ., Japan
J. Carl Hsu	<i>Communications software</i> , Bell Labs, USA	S. T. Yau	<i>Mathematics</i> , Harvard Univ., USA
Walter Kaminsky	<i>Chemistry</i> , Hamburg Univ., Germany	Masahiro Yoshimura	<i>Materials science</i> , Tokyo Inst. of Tech., Japan

## Domestic Members of the Editorial Board

Yuan-qiang Cai	<i>Geotechnical engineering</i>	Qun-sheng Peng	<i>Computer aided design</i>
Wei-qiu Chen	<i>Solid mechanics</i>	Zhi-quan Shen	<i>Polymer science</i>
Hao-jiang Ding	<i>Solid mechanics</i>	You-xian Sun	<i>Control theory &amp; application</i>
Jian-ren Fan	<i>Thermophysics engineering</i>	Li Wang	<i>Nano-materials</i>
Pei-en Feng	<i>Mechanical design &amp; theory</i>	Min-quan Wang	<i>Inorganic chemistry</i>
Chang-you Gao	<i>Polymer materials</i>	Yuan-mei Wang	<i>Medical imaging &amp; neural network theory</i>
Zheng-kuan Jiao	<i>Physics of condensed matter</i>	Mi Yan	<i>Metallic materials</i>
Chong-qing Lu	<i>Energy engineering</i>	Qiang Zheng	<i>Polymer materials &amp; composites</i>
Ming-jiang Ni	<i>Thermal science</i>	Wei-qiu Zhu	<i>Mechanics</i>

## Copyright

Submission of a manuscript implies: that the work described has not been published before (except in the form of an abstract or as part of a published lecture, review, or thesis); that it is not under consideration for publication elsewhere; that its publication has been approved by all co-authors, if any, as well as – tacitly or explicitly – by the responsible authorities at the institution where the work was carried out. The author warrants that his/her contribution is original and that he/she has full power to make this grant. The author signs for and accepts responsibility for releasing this material on behalf of any and all co-authors. Transfer of copyright to *Journal of Zhejiang University SCIENCE A* and Springer becomes effective if and when the article is accepted for publication. After submission of the "License to publish" signed by the first author, changes of authorship or in the order of the authors listed will not be accepted by *Journal of Zhejiang University SCIENCE A* and Springer. The copyright covers the exclusive right (for U.S. government employees: to the extent transferable) to reproduce and distribute the article, including reprints, translations, photographic reproductions, microform, electronic form (offline, online) or other reproductions of similar nature.

An author may self-archive the English language version of his/her article on his/her own website and his/her institution's repository; however he/she may not use the publisher's PDF version which is posted on [www.springerlink.com](http://www.springerlink.com). Furthermore, the author may only post his/her version provided acknowledgement is given to the original source of publication and a link must be accompanied by the following text: "The original publication is available at [springerlink.com](http://springerlink.com)".

All articles published in this journal are protected by copyright, which covers the exclusive rights to reproduce and distribute the article (e.g., as offprints), as well as all translation rights. No material published in this journal may be reproduced photographically or stored on microfilm, in electronic databases, video disks, etc., without first obtaining written permission from the publishers. The use of general descriptive names, trade names, trademarks, etc., in this publication, even if not specifically identified, does not imply that these names are not protected by the relevant laws and regulations.

While the advice and information in this journal is believed to be true and accurate at the date of its going to press, neither the authors, the editors, nor the publishers can accept any legal responsibility for any errors or omissions that may be made. The publisher makes no warranty, express or implied, with respect to the material contained herein.

Special regulations for photocopies in the USA: Photocopies may be made for personal or in-house use beyond the limitations stipulated under Section 107 or 108 of U.S. Copyright Law, provided a fee is paid. All fees should be paid to the Copyright Clearance Center, Inc., 222 Rosewood Drive, Danvers, MA 01923, USA, Tel.: +1-978-7508400, Fax: +1-978-6468600, <http://www.copyright.com>, stating the ISSN of the journal, the volume, and the first and last page numbers of each article copied. The copyright owner's consent does not include copying for general distribution, promotion, new works, or resale. In these cases, specific written permission must first be obtained from the publishers.

**Managing Editor** Helen (Yuehong) Zhang, 20 Yugu Road, Hangzhou 310027, China

**Tel/Fax** +86-571-87952276/87952331

**Email** [jzus@zju.edu.cn](mailto:jzus@zju.edu.cn)

**Sponsored by** Zhejiang University

**Published by** Zhejiang University Press

ISSN 1673-565X

CN 33-1236/Z

<http://www.zju.edu.cn/jzus>; <http://www.springerlink.com>

The Editorial Office of Journal of Zhejiang University SCIENCE, 20 Yugu Road, Hangzhou 310027, China



## Science Letters:

# Visual odometry for road vehicles—feasibility analysis

SOTELO Miguel-angel<sup>†1</sup>, GARCÍA Roberto<sup>1</sup>, PARRA Ignacio<sup>1</sup>, FERNÁNDEZ David<sup>1</sup>,  
 GAVILÁN Miguel<sup>1</sup>, ÁLVAREZ Sergio<sup>1</sup>, NARANJO José-eugenio<sup>2</sup>

<sup>(1)</sup>Department of Electronics, University of Alcalá, Alcalá de Henares 28871, Spain

<sup>(2)</sup>Department of Informatics, Industrial Automation Institute, CSIC, Madrid, Spain

<sup>†</sup>E-mail: sotelo@depeca.uah.es

Received Aug. 24, 2007; revision accepted Oct. 30, 2007

**Abstract:** Estimating the global position of a road vehicle without using GPS is a challenge that many scientists look forward to solving in the near future. Normally, inertial and odometry sensors are used to complement GPS measures in an attempt to provide a means for maintaining vehicle odometry during GPS outage. Nonetheless, recent experiments have demonstrated that computer vision can also be used as a valuable source to provide what can be denoted as visual odometry. For this purpose, vehicle motion can be estimated using a non-linear, photogrammetric approach based on Random Sample Consensus (RANSAC). The results prove that the detection and selection of relevant feature points is a crucial factor in the global performance of the visual odometry algorithm. The key issues for further improvement are discussed in this letter.

**Key words:** 3D visual odometry, Ego-motion estimation, Random Sample Consensus (RANSAC), Photogrammetric approach  
**doi:**10.1631/jzus.2007.A2017 **Document code:** A **CLC number:** TP391.4

## INTRODUCTION

Accurate estimation of the vehicle global position is a key issue, not only for developing useful driver assistance systems, but also for achieving autonomous driving. The proposed challenge is to use stereo-vision capabilities to provide accurate estimation of the vehicle ego-motion with regard to the road, and thus to compute the vehicle global position. This is becoming more and more tractable to implement on standard PC-based systems nowadays. However, there are still open issues that constitute a challenge in achieving highly robust ego-motion estimation in real traffic conditions. These are discussed in the following lines:

- (1) There must exist stationary reference objects that can be seen from the cameras position.
- (2) Information contained on road scenes can be divided into road feature points and background feature points.
- (3) Typical road scenes may contain a large amount of outlier information. This includes non-

stationary objects such as moving vehicles, pedestrians, and car wipers. All these artifacts contribute to false measurements for ego-motion estimation.

In this paper, we investigated a method for ego-motion computing based on stereo-vision. The idea of estimating displacements from two 3D frames using stereo vision has been previously used in (Nister *et al.*, 2004; Hagnelius, 2005). A common factor of these works is the use of robust estimation and outliers rejection using Random Sample Consensus (RANSAC) (Fischler and Bolles, 1981). In (Nister *et al.*, 2004), a so-called firewall mechanism is implemented in order to reset the system to remove cumulative error. Both monocular and stereo-based versions of visual odometry were developed in (Nister *et al.*, 2004). In (Agrawal and Konolige, 2006) a stereo system composed of two wide Field of View cameras was installed on a mobile robot together with a GPS receiver and classical encoders. The system was tested in outdoor scenarios on different runs under 150 m. In the present work, the solution of the non-linear system equations describing the vehicle

motion at each frame is computed under the non-linear, photogrammetric approach using RANSAC. A clear contribution of this work is the optimization of the RANSAC parameters. Exhaustive experimentation was conducted in this aspect in order to yield the really optimal RANSAC parameters. Indeed, a genetic algorithm was off-line run to set a comparison between the optimized RANSAC parameters achieved on-line by our method and the same parameters obtained off-line by an evolutionary algorithm performing exhaustive global search. The results were extremely similar.

## FEATURES DETECTION AND MATCHING

In each frame, Harris corners are detected, since this type of point feature has been found to yield detections that are relatively stable under small to moderate image distortions (Schmid *et al.*, 2000). In order to reduce the computation time and to remove irrelevant features that move in the central part of the image, the method is only run in the lower left and right parts of the image, where significant features are most frequently located. The feature points are matched at each frame, using the left and right images of the stereo-vision arrangement, and between pairs of frames. Features are detected in all frames and matches are allowed only between features. The details about the matching method can be found in (Alonso *et al.*, 2007), where a similar method was used for pedestrian detection purpose.

## PROBLEM STATEMENT

The problem of estimating the trajectory followed by a moving vehicle can be defined as that of determining at frame  $i$  the rotation matrix  $\mathbf{R}_{i-1,i}$  and the translational vector  $\mathbf{T}_{i-1,i}$  that characterize the relative vehicle movement between two consecutive frames. The use of non-linear methods becomes necessary since the 9 elements of the rotation matrix cannot be considered individually (the rotation matrix has to be orthonormal). Indeed, there are only 3 unconstrained, independent parameters, i.e., the three rotation angles  $\theta_x$ ,  $\theta_y$ , and  $\theta_z$ , respectively. The system's rotation can be expressed by means of the rotation matrix  $\mathbf{R}$  given by

$$\mathbf{R} = \begin{pmatrix} cycz & sxsyscz + cxsz & -cxsyscz + sxsz \\ -cysz & -sxsysz + cxcz & cxsysz + sxcz \\ sy & -sxcy & cxcy \end{pmatrix}, \quad (1)$$

where  $ci = \cos \theta_i$  and  $si = \sin \theta_i$  for  $i = x, y, z$ . The estimation of the rotation angles must be undertaken by using an iterative, least squares-based algorithm. Otherwise, the linear approach can lead to a non-realistic solution where the rotation matrix is not orthonormal.

## RANSAC

RANSAC (RANdom SAmple Consensus) is an alternative to modifying the generative model to have heavier tails to search the collection of data points  $S$  for good points that reject points containing large errors, namely "outliers". RANSAC is used in this work to estimate the rotation matrix  $\mathbf{R}$  and the translational vector  $\mathbf{T}$  that characterize the relative movement of a vehicle between two consecutive frames. The input data to the algorithm are the 3D coordinates of the selected points at times  $t$  and  $t+1$ . After drawing samples from three points, the models that best fit to the input data are estimated using non-linear least squares. Then, a distance function is defined to classify the rest of points as inliers or outliers depending on threshold  $D_t$ . In this case, the distance function is the square error  $e$  between the sample and the predicted model. In this work, the following parameters were chosen:  $D_t = 0.005 \text{ m}^2$ ,  $N = 10$  (maximum number of trials),  $TH = 0.8$  (consensus threshold). Detailed explanations about how these parameters are obtained can be found in (García *et al.*, 2007).

## NON-LINEAR LEAST SQUARES

Given a system of  $n$  non-linear equations containing  $p$  variables the solution for  $n < p$  does not form a vectorial subspace in general. Its structure depends on the nature of the equations. For  $n = p$  a finite set of solutions exists instead of a unique solution as in the linear case. To solve this problem, an underdetermined system is built ( $n > p$ ) in which a given error function  $E(x)$  must be minimized. The error function

can exhibit several local minima, although in general there is a single global minimum. Unfortunately, there is no numerical method that can assure the obtaining of such global minimum, except for the case of polynomial functions. Iterative methods based on the gradient descent can find a global minimum whenever the starting point meets certain conditions. By using non-linear least squares the process is in reality linearized following the tangent linearization approach. Formally, the functions describing the system equations can be approximated using the first term of Taylor's series expansion. After linearization, an overdetermined linear system of  $n$  equations and  $p$  variables has been constructed ( $n < p$ ). The system can be solved using iterative non-linear least squares. At each iteration  $k$  of the regression method the linearized system is solved (given the 3D coordinates of  $N$  points in two consecutive frames). The vector of independent terms  $c$  is computed at iteration  $k$ . Once the Jacobean matrix  $J$  of the non-linear equations and vector  $c$  have been computed at iteration  $k$ , the non-linear system is finally solved. On completion of the process the algorithm yields the final solution  $w = [\theta_x, \theta_y, \theta_z, t_x, t_y, t_z]^T$  that describes the relative vehicle movement between two consecutive iterations at  $t_0$  and  $t_1$ , respectively. The termination condition is given by a minimum value of error or a maximum number of iterations. The complete mathematical details of this operation are provided in (García *et al.*, 2007).

#### DATA POST-PROCESSING

This is the last stage of the algorithm. Some partial estimations are discarded, in an attempt to remove as many outliers as possible. For this purpose, high root mean square error  $e$  estimations are removed and meaningless rotation angles estimations (non physically feasible) are discarded. Accordingly, a maximum value of  $e$  has been set to 0.5. Similarly, a maximum rotation angle threshold is used to discard meaningless rotation estimations. In such cases, the estimated vehicle motion is maintained according to motion estimated in the previous frame. Removing false rotation estimations is a key aspect in visual odometry systems since false rotation estimations lead to high cumulative errors.

#### IMPLEMENTATION AND RESULTS

The visual odometry system described in this paper has been implemented on a Pentium IV at 1.7 GHz running Linux Knoppix 3.7. A stereo vision platform based on Fire-i cameras (IEEE1394) was installed on a prototype vehicle. Several sequences were recorded in different locations including Alcalá de Henares and Arganda del Rey in Madrid (Spain). All sequences correspond to real traffic conditions in urban environments. In the experiments, the vehicle was driven below the maximum allowed velocity in cities, i.e., 50 km/h. A real experiment is graphically documented in this section as illustrated in Fig.1. The

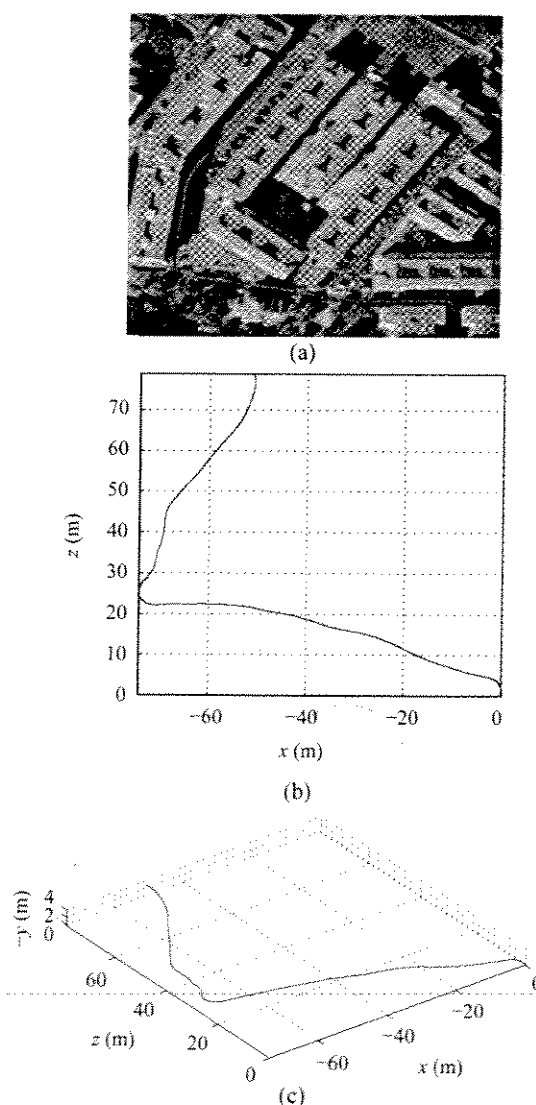


Fig.1 (a) Aerial view of the trajectory followed in the experiment; (b) Estimated 2D trajectory; (c) Estimated 3D trajectory

car ran a real distance of 276.79 m while the system estimated a distance of 272.52 m, which can be considered as quite an accurate visual estimation. Nonetheless, the 3D visual odometry method yields an altitude change of 2 m during the car's run, which is not a realistic figure since the trajectory described by the vehicle is almost planar. The whole sequence lasted 50.83 s and was analyzed by the system in 53.19 s including acquisition time. It can then be stated that algorithm execution at frame rate is practically preserved.

## CONCLUSION AND FUTURE WORK

After observation of the results obtained in this work, it can be stated that the 3D visual odometry method described in this paper provides approximate trajectory estimations that can be useful for enhancing GPS accuracy, or even for substituting GPS in short outage periods. Nonetheless, the system provides estimations that exhibit cumulative errors. A major conclusion of this feasibility analysis is that it cannot be realistically expected that a 3D visual odometry system be used as a standalone method for global positioning applications. Apart from this obvious fact, other problems arise especially in altitude estimation. The reason for this stems from the fact that estimations of pitch and roll angles become complex using visual means, since variations of these angles in usual car displacements are really small and difficult to measure in the 2D image plane. These difficulties produce a non-real altitude change in estimated 3D trajectories. Another problem arises when features corresponding to non-stationary objects are detected and used by the system. As part of our future work we envision to develop a method for discriminating

stationary points from those which are moving in the scene. Moving points can correspond to pedestrians or other vehicles circulating in the same area. Vehicle motion estimation will mainly rely on stationary points. Another important aspect for future improvement is the feature detection stage. For this purpose, the robustness of the process will be enhanced by incorporating temporal tracking of invariant-to-rotation features. This will allow for removing false features, i.e. glitches and features that correspond to unreal moving objects, such as, for instance, the edge caused by the intersection of a moving car and a tree. Finally, we will try to minimize the drift using sparse bundle adjustment.

## References

- Agrawal, M., Konolige, K., 2006. Real-time Localization in Outdoor Environments Using Stereo Vision and Inexpensive GPS. 18th Int. Conf. on Pattern Recognition, p.1063-1068. [doi:10.1109/ICPR.2006.962]
- Alonso, I.P., Llorca, D.F., Sotelo, M.A., Bergasa, L.M., de Toro, P.R., Nuevo, J., Ocana, M., Garrido, M.A.G., 2007. Combination of feature extraction methods for SVM pedestrian detection. *IEEE Trans. on Intell. Transport. Syst.*, **8**(2):292-307. [doi:10.1109/TITS.2007.894194]
- Fischler, M.A., Bolles, R.C., 1981. Random sample consensus: a paradigm for model fitting with applications to image analysis and automated cartography. *Commun. ACM*, **24**(6):381-395. [doi:10.1145/358669.358692]
- García, R., Sotelo, M., Parra, I., Fernández, D., Gavilán, M., Álvarez, S., Naranjo, J.E., 2007. Visual odometry for road vehicles. *J. Intell. Rob. Syst.*, in press. [10.1007/s10846-007-9182-5]
- Hagnelius, A., 2005. Visual Odometry. Master Thesis, Umea University.
- Nister, D., Naroditsky, O., Beren, J., 2004. Visual Odometry. Proc. IEEE Conf. on Computer Vision and Pattern Recognition, 1:652-659. [doi:10.1109/CVPR.2004.1315094]
- Schmid, C., Mohr, R., Bauckhage, C., 2000. Evaluation of interest point detectors. *Int. J. Computer Vision*, **37**(2): 151-172. [doi:10.1023/A:1008199403446]

## Information for Authors

### Aim

The *Journals of Zhejiang University SCIENCE (A & B)* are edited by the international board of distinguished Chinese and foreign scientists, and are aimed to present the latest developments and achievements in scientific research in China and overseas to the world's scientific circles, especially to stimulate and promote academic exchange between Chinese and foreign scientists everywhere.

### Scope

*JZUS-A* covers research in Applied Physics, Mechanical and Civil Engineering, Environmental Science and Energy, Materials Science and Chemical Engineering, Electrical Engineering and Electronics. Research in Computer Science, Information Sciences, and Applied Mathematics is also accepted.

### Manuscript Preparation

Only E-paper based on Word or PDF format should be sent to [jzus@zju.edu.cn](mailto:jzus@zju.edu.cn). For detail information please visit <http://www.zju.edu.cn/jzus>. The electronic manuscript should be prepared to accord with following:

**Title and by-line:** Name, professional title, affiliation (institution) of the author(s); city, zip code, country and E-mail address of the author(s) should be given.

**Abstract:** About 100~150 words without mathematical & chemical equations and citations; should outline the objective, method and main results and conclusion.

**Key words:** Provide 3 to 6 key words or phrases for cross-indexing this article.

**Text:** The text should contain an Introduction that puts the paper into proper perspective for the reader, and should also contain Methods, Results, Discussion and Conclusion sections. Each figure, including a, b, c etc. of each figure, must present the caption.

**Acknowledgements:** Individuals or units other than authors who were of direct help in the work could be acknowledged by a brief statement following the text.

**References:** Only essential references (journal article, book, thesis, report, proceedings, etc.) cited in the text (in Author-Year format) can be listed in alphabetical order by author's surname. Personal communications and unpublished data are not acceptable references. All authors in the references should be listed.

### JZUS-A Database Information

*JZUS-A* has been accepted by Science Citation Index-Expanded (SCI-E), Ei Compendex, CA, SA, AJ, ZM, CABI, BIOSIS, ZR, CSA (AHTD/AI/AP/ASF/CD/CE/CI/CIS/Corr/C-WC/EC/EMA/MBF/ESPM/MD/MG/OA/OT/SS/WR) for abstracting and indexing respectively, since *JZUS* founded in 2000 and *JZUS-A* started in 2005.

### Address of JZUS

Editorial Office, Journal of Zhejiang University SCIENCE,  
20 Yugu Road, Hangzhou 310027, China  
Tel: +86-571-87952276, Fax: +86-571-87952331  
Email: [jzus@zju.edu.cn](mailto:jzus@zju.edu.cn)

Warmly welcome scientists all over the world to contribute Reviews, Articles and Science Letters to *JZUS (A & B)*.

## Subscription Information (JZUS-A)

ISSN print edition 1673-565X

ISSN electronic edition 1862-1775

Volume 8 (12 issues) will appear in 2007

### Subscription Rates

For information on subscription rates please contact:

Customer Service

China: [zjhzpost@tom.com](mailto:zjhzpost@tom.com)

North and South America:

[journals-ny@springer.com](mailto:journals-ny@springer.com)

Outside North and South America:

[subscriptions@springer.com](mailto:subscriptions@springer.com)

### Orders and Inquiries

#### China

Newspapers/Periodicals Issue Dept.

Hangzhou Post Bureau, 310000

Tel: +86-571-87182140, Fax: +86-571-87182136

Email: [zjhzpost@tom.com](mailto:zjhzpost@tom.com)

#### North and South America

Springer New York, Inc.

Journal Fulfillment

P.O. Box 2485

Secaucus, NJ 07096 USA

Tel: +1-800-SPRINGER or +1-201-348-4033

Fax: +1-201-348-4505

Email: [journals-ny@springer.com](mailto:journals-ny@springer.com)

#### Outside North and South America

Springer Distribution Center

Customer Service Journals

Haberstr. 7

69126 Heidelberg, Germany

Tel: +49-6221-345-0, Fax: +49-6221-345-4229

Email: [subscriptions@springer.com](mailto:subscriptions@springer.com)

**Cancellations** must be received by September 30 to take effect at the end of the same year.

**Changes of address** Allow for six weeks for all changes to become effective. All communications should include both old and new addresses (with postal codes) and should be accompanied by a mailing label from a recent issue. According to § 4 Sect. 3 of the German Postal Services Data Protection Regulations, if a subscriber's address changes, the German Federal Post Office can inform the publisher of the new address even if the subscriber has not submitted a formal application for mail to be forwarded. Subscribers not in agreement with this procedure may send a written complaint to Customer Service Journals within 14 days of publication of this issue.

**Microform editions** are available from: ProQuest. Further information available at <http://www.il.proquest.com/uni>

### Electronic edition

An electronic version is available at [springerlink.com](http://springerlink.com).

### Production

Printed in People's Republic of China

Springer-Verlag is part of Springer Science+Business Media

## Contents

### Electrical & Electronic Engineering

**Science Letters:** A robust polysilicon-assisted SCR in ESD protection application ..... CUI Qiang, HAN Yan, DONG Shu-rong, LIOU Jun-jie (1879)

Equalization for continuous phase modulation over frequency-selective fading channels ..... JIN Xiao-dong, ZHAO Min-jian, SUN Ling, SHEN Wen-li (1884)

Optimal state feedback control of brushless direct-current motor drive systems based on Lyapunov stability criterion ..... WANG Wei, JIN Ruo-jun, JIANG Jing-ping (1889)

A novel MMSE based codebook construction for MIMO precoded spatial multiplexing with limited feedback ..... SHE Feng, LUO Han-wen, WANG Xin (1894)

Practical realization of dual S arm antenna for beam steering applications ..... MEHTA Amit (1901)

Multiobjective extremal optimization with applications to engineering design ..... CHEN Min-rong, LU Yong-zai, YANG Gen-ke (1905)

Robust exponential stability analysis of a larger class of discrete-time recurrent neural networks ..... ZHANG Jian-hai, ZHANG Sen-lin, LIU Mei-qin (1912)

Iterative learning control of SOFC based on ARX identification model ..... HUO Hai-bo, ZHU Xin-jian, TU Heng-yong (1921)

Pressure observer based adaptive robust trajectory tracking control of a parallel manipulator driven by pneumatic muscles ..... ZHU Xiao-cong, TAO Guo-liang, CAO Jian (1928)

Research on new software compensation method of static and quasi-static errors for precision motion controller ..... REN Kun, FU Jian-zhong, CHEN Zi-chen (1938)

Layer-layout-based heuristics for loading homogeneous items into a single container ..... WANG Zhou-jing, LI Kevin W. (1944)

Support Vector Machine active learning for 3D model retrieval ..... LENG Biao, QIN Zheng, LI Li-qun (1953)

Implementation of a new PC based controller for a PUMA robot ..... FAROOQ M., WANG Dao-bo (1962)

Designing reduced beacon trajectory for sensor localization ..... HUANG Wen-liang, LI Shi-jian, LIU Duo (1971)

Content subscribing mechanism in P2P streaming based on gamma distribution prediction ..... GUO Tong-qiang, WENG Jian-guang, ZHUANG Yue-ting (1983)

Performance of beacon safety message dissemination in Vehicular Ad hoc NETWORKS (VANETs) ..... YOUSEFI Saleh, FATHY Mahmood, BENSLIMANE Abderrahim (1990)

Implementing VLPR systems based on TMS320DM642 ..... ZHU Le-qing, ZHANG San-yuan, YE Xiu-zi (2005)

**Science Letters:** Visual odometry for road vehicles—feasibility analysis ..... SOTELO Miguel-angel, GARCIA Roberto, PARRA Ignacio, FERNÁNDEZ David, GAVILÁN Miguel, ÁLVAREZ Sergio, NARANJO José-eugenio (2017)

Illumination system with compound parabolic retro-reflector for single LCOS panel projection display ..... ZHEN Yan-kun, YE Zi, ZHANG Wen-zi, ZHAO Ting-yu, YU Fei-hong (2021)

Studies of surface plasmon resonance sensor using bi-beam differential measurement approach ..... ZENG Han-rong, WANG Xiao-ping, ZHANG Xue-jiao (2027)

### Computational Mathematics

Weak and strong convergence of an explicit iteration scheme with perturbed mapping for nonexpansive mappings ..... WANG Ya-qin (2032)

A note on the Marcinkiewicz integral operators on  $F_p^{a,q}$  ..... ZHANG Chun-jie, QIAN Rui-rui (2037)

2007 analysis on uptrend JZUS (A&B) SCI citation records and DOI resolutions ..... (i)

Total contents ..... (i)